



GERSTENBERG SERVICES A/S

Gerstenberg Polaron

The most versatile tubular scraped surface heat exchanger in the fat crystallisation industry

Production

Unsurpassed heat transmission for production of quality margarine is obtained by direct cooling with natural or artificial refrigerants like CO₂, NH₃ and R507/R32. Especially the natural CO₂ refrigerant sets new standards in your margarine production, and new recipes are achievable.

The scraping system is of the "floating" type in plastic or steel.

Rotor heating is secured by an integrated water heater system and water shaft seals which are highly reliable due to the design and the outstanding materials used for wearing parts.

Energy efficiency

Safe separation of refrigerant liquid from gas secured by an internal return line vessel system and exact liquid level control in the cooling jacket ensure efficient performance of the cooling system. Special attention should be paid to the natural CO₂ refrigerant which sets new standards for energy savings in margarine production.

Materials

In general, product contacting parts are made in AISI 316; however, process cylinders are made in carbon steel with hard chromium plating and product seal surfaces are made in tungsten carbide.

Cleaning, maintenance and service

The Gerstenberg Polaron is designed for fast and reliable CIP cycles and all wearing parts are easily accessible. Short down-times are ensured by fast removal of refrigerant in the case of production stops as well as fast start-up of operation due to the refrigerant rescue tank placed inside the cabinet.



The wearing parts of the water shaft seals are easily exchanged, which guarantees secure and quick service.

Compliance

The Gerstenberg Polaron is constructed in conformity with the European Machinery Directive 2006/42/EC and with the European regulation on food contact materials and parts Regulation EC 1935/2004 within a product temperature range from -29°C to +95°C. The pressure vessel is certified in accordance with the European Pressure Equipment Directive PED 97/23/EC. Other certifications for unfired pressure vessels are available on request.

Refrigerants

CO₂, NH₃, R507 and R32

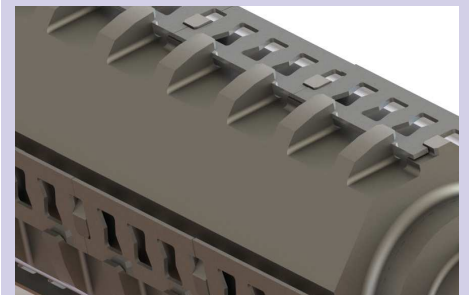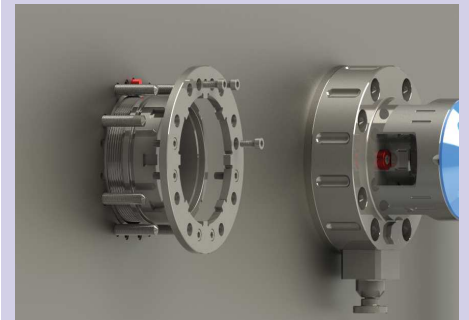

Gerstenberg Services A/S
Vibeholmsvej 21
2605 Brøndby
Denmark
Tel.: +45 43 43 20 26
info@gerstenbergs.com
www.gerstenbergs.com




GERSTENBERG SERVICES A/S



Polaron is a registered trademark of Gerstenberg Services A/S and covers the new series of advanced high pressure tubular scraped surface heat exchangers.

Gerstenberg Polaron		A	A+B	A+B+C	A+B+C+D	
Puff pastry margarine / To = -20°C	CO2	kg/h	N/A	1,624	2,436	3,248
Table margarine / To = -20°C		kg/h	1,624	3,248	4,872	6,496
Shortening / To = -20°C		kg/h	2,436	4,872	7,308	9,744
Puff pastry margarine / To = -20°C	NH3	kg/h	N/A	1,160	1,740	2,320
Table margarine / To = -20°C		kg/h	1,160	2,320	3,480	4,640
Shortening / To = -20°C		kg/h	1,740	3,480	5,220	6,960
Puff pastry margarine / To = -25°C	R507 or R32	kg/h	N/A	1,160	1,740	2,320
Table margarine / To = -25°C		kg/h	1,160	2,320	3,480	4,640
Shortening / To = -25°C		kg/h	1,740	3,480	5,220	6,960
Heat exchange surface	m ²	0.61	1.22	1.83	2.44	
Annular space	mm	10				
Process cylinder diameter x length	mm	ø152 x 1280				
Product volume / cylinder	ltr	5				
Product piping connections	mm	DN40				
Max. working pressure, product side	bar	< 120				
Cooling requirements for table margarine, CO2 at -20°C	kW	76	152	228	304	
Cooling requirements for table margarine, NH3 at -20°C	kW	55	110	165	220	
Cooling requirements for table margarine, R507 or R32 at -25°C	kW	55	110	165	220	
Rotor speed at 50 Hz	rpm	380				
Gear motors for puff pastry margarine	kW	45	37 + 45	37 + 37 + 45	37 + 37 + 45 + 45	
Gear motors for table margarine		37	30 + 37	30 + 30 + 45	30 + 30 + 37 + 37	
Gear motors for shortening		22	22 + 22	22 + 22 + 30	22 + 22 + 30 + 30	
Water heater capacity / volume		1 x 15 kW / 60 ltr		2 x 15 kW / 60 ltr		
Motor for water heater pump	kW	0.37				

The above capacities are nominal values and may vary depending on product composition.

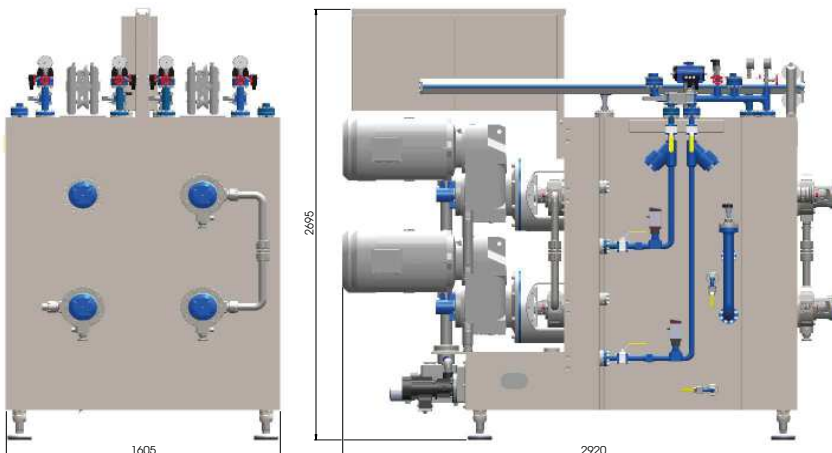

Polaron A+B+C+D CO2, cascade system

The information in this document is subject to change without notice

Gerstenberg & Agger A/S and Gerstenberg Services A/S are independent private companies and are not part of SPX Corporation.



Gerstenberg Services A/S
 Vibeholmsvej 21
 2605 Brøndby
 Denmark
 Tel.: +45 43 43 20 26
 info@gerstenbergs.com
 www.gerstenbergs.com